

Code	Description	Size	Colour
06557	Soudal Cloth Duct Tape	36mm 4.2m 10pk	Assorted
56622	Soudal Cloth Duct Tape	36mm x 30m	Black
56621	Soudal Cloth Duct Tape	36mm x 30m	Red
56623	Soudal Cloth Duct Tape	36mm x 30m	Silver
56619	Soudal Cloth Duct Tape	48mm x 30m	Black
56618	Soudal Cloth Duct Tape	48mm x 30m	Red
56620	Soudal Cloth Duct Tape	48mm x 30m	Silver

## 1. Description


Soudal Cloth Duct Tape is a heavy duty tape that is perfect for binding, repair jobs and reinforcing. It can be painted over and is water resistant.

## 2. Characteristics

- Heavy-duty cloth duct tape
- Bind, repair & reinforce
- Can be painted over
- Water resistant

## 3. Technical Data

Structure:

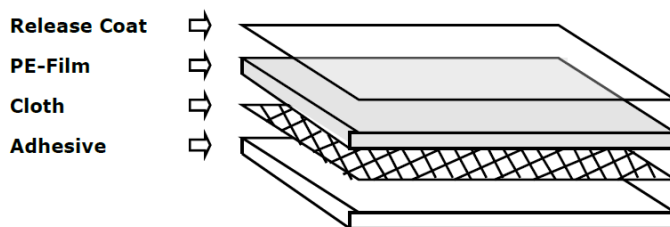

<b>Backing:</b>	PE Coated Cloth
<b>Adhesive Base:</b>	Natural Rubber
<b>Total Thickness:</b>	0.30mm
<b>Peel Adhesion :</b> (kg/25mm, PSTC 101)	1.00
<b>Rewinding Force :</b> (kg/50mm, PSTC -8)	2.00
<b>Tensile Strength:</b> (kg/25mm)	13.00
<b>Holding Power:</b> (25mm x 25mm/40°C, PSTC 107)	20min
<b>Ball Tack:</b> (cm/Ballno.20, PSTC – 6)	20.00
<b>Heat Resistance:</b>	40°C
<b>Application Temperature:</b>	5°C to +35°C

\* The used test methods are based on acceptable specifications like PSTC or internal test methods

\* All the technical data are based on average values.

#### 4. Applications

- High quality purpose for irregular surface, stationery, water proof, vinyl repair, protection
- Moisture barrier for both indoor & outdoor applications,

#### 6. Shelf Life

- 1 year from the day of purchase (20°C/60%)

#### 7. Application Instructions

**State:** Thoroughly clean and dry surfaces.  
**Type:** All usual building substrates  
**State:** Porous surfaces should be primed with Primer 150, Surface Activator may be used on non-porous surfaces.

Soudal recommends preliminary compatibility tests prior to application.

##### Application

The adhesive is pressure sensitive. The more pressure, the more adhesion power will be obtainable. Dependent upon what type of material  
To be adhered to, adhesive may be deposited on surface, especially for marble or PVC materials. When this tape is to be peeled off, do so slowly.

Do not apply to skin or use as electric insulation.

#### 8. Health and Safety Recommendation

- Apply the usual industrial hygiene.

##### Remark

*The directives and data contained in this documentation is provided in good faith and accurately reflect Soudal's knowledge when its products are properly stored, handled and applied under normal conditions in accordance with Soudal's recommendations. In practice, the diversity of the materials, substrates, environments, site conditions, product storage, handling and application are such that no warranty can be given in respect to the merchantability or fit for purpose, of any product. All users must determine the product suitability for their purposes through testing. This technical data sheet and product properties may change without notice so users, suppliers and retailers of Soudal products should always check that the data sheets they have are the latest. To the maximum extent permitted by law, Soudal disclaims all warranties in relation to either the manufacture, storage and end use of the product. All orders are accepted subject to our current terms of trade. **If any clarification is required, please contact Soudal Technical Services or email [info@soudal.co.nz](mailto:info@soudal.co.nz).***

**Last Updated:** 29 May 2025

Supplier contact details:	Soudal Ltd	Freephone: 0800 70 10 80
	134 Kohia Drive	Phone: (07) 847 5540
	Horotiu	
	Hamilton 3288	Email: <a href="mailto:info@soudal.co.nz">info@soudal.co.nz</a>
	New Zealand	Website: <a href="http://www.soudal.co.nz">www.soudal.co.nz</a>