




Post Kit Retracting Clothesline

Product Manual

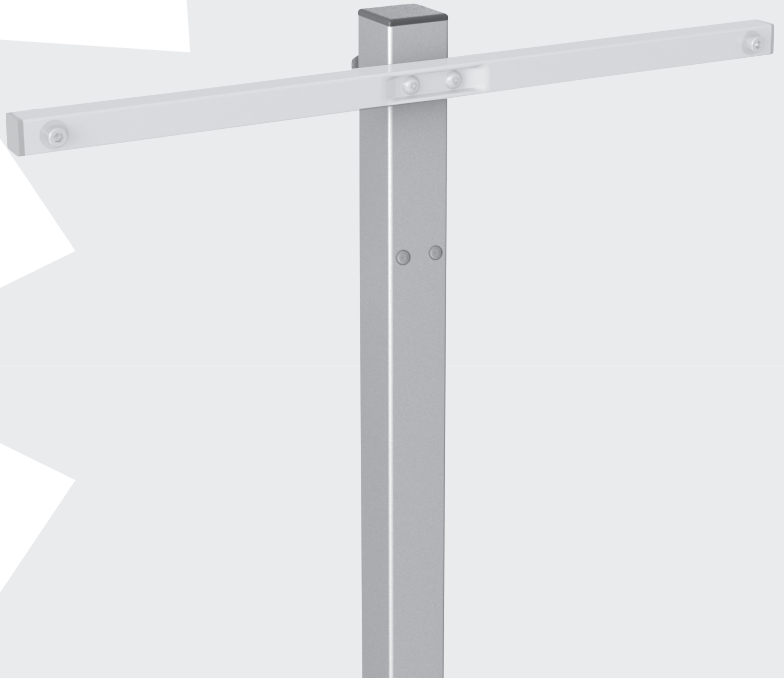

Congratulations

Congratulations on the purchase of your new

Sun King Retracting Clothesline Post Kit.

It is important that you read these instructions thoroughly before installation and use. In this way you will benefit from all the design features and enjoy safe use of the product.

Thank you for choosing Sun King.


Note: An optional Ground Socket (100535) is available, which allows you to remove your post from the ground.

Carton contents


Part name	Qty.
Bottom post	1
Top post	1
Product manual	1
Post kit accessory bag (includes):	1
2 x bolt – socket head M6 x 65	
2 x nyloc nut – M6	
2 x bolt – socket head M8 x 70	
2 x nyloc nut – M8	
4 x M6 washer	
4 x M8 washer	
1 x hex key 5mm	
1 x hex key 4mm	

Fastener Identification

Not to scale



bolt – socket head M8 x 70



bolt – socket head M6 x 65



M8 washer



Nyloc nut - M8



M6 washer



Nyloc nut - M6

Please retain this Product Manual. Record the following information for future reference.

Product Number (printed on carton): _____

Date of purchase: _____

Name and location of store: _____



Designed and tested under a Quality System that meets Hills demanding quality specifications.

Made in China

Step 1 – Installing Fixed Posts

- 1.1 Insert the top post into the bottom post and secure with M6 x 65 bolts, nuts and washers.
- 1.2 Mark out the desired position for the post in line with the Retracting Clothesline Cabinet.
- 1.3 Refer to your Retracting Clothesline product manual for site selection and installation details.
- 1.4 Dig a hole 200mm (8") in diameter x 800mm (32") deep. Place approximately 200mm (8") of coarse gravel in the bottom of the hole.
- 1.5 Insert the post into the ground.
- 1.6 Adjust the post until the desired height is achieved (refer to your Retracting Clothesline product manual).
- 1.7 Support the post and concrete into position.
- 1.8 Concrete should be damp enough to hold together when squeezed in your hand.
- 1.9 Settle the concrete by pushing a thin stick into the mix several times.
- 1.10 Use a spirit level to check the assembly is vertical.
- 1.11 Slope the surface of the concrete away from the post to provide drainage.


Allow 48 hours for the concrete to set before use.

If a socket is used, do not remove the post until the concrete has set.

Note: When assembling your cabinet to your post, all fasteners required are supplied with your mount bar.


- 2.1 Your Post Kit has three height positions for a total of 236mm (9 5/16") adjustment (**Fig. 1**).
- 2.2 To adjust the height of the top post, remove bolts, washers and nuts and move to new position.
- 2.3 Re-secure bolts, washers and nuts.
- 2.4 For smaller incremental line height adjustment, cut the required amount from the bottom of the post.

Fig. 1

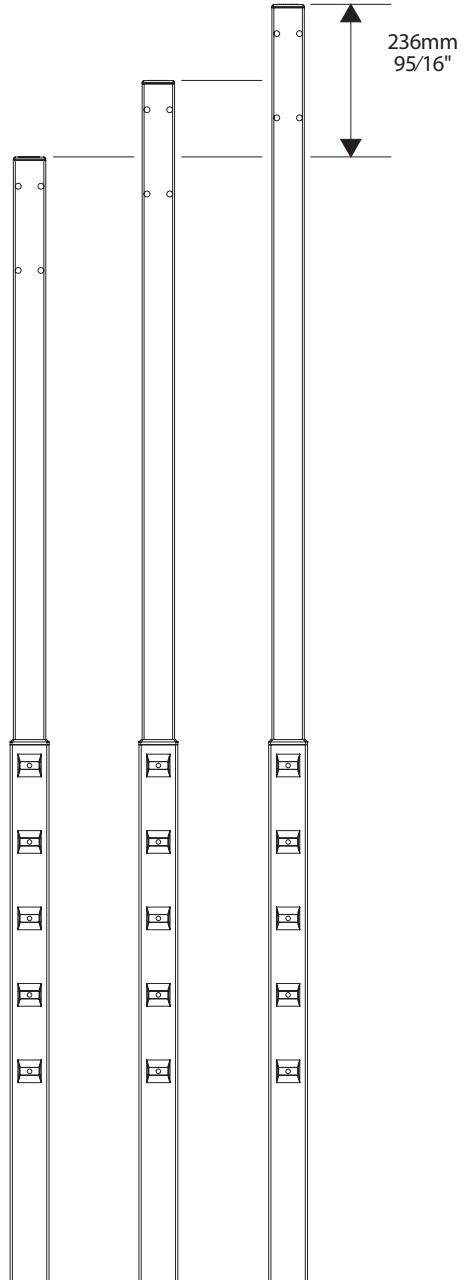

Adjustable Post Assembly

Fig. 2

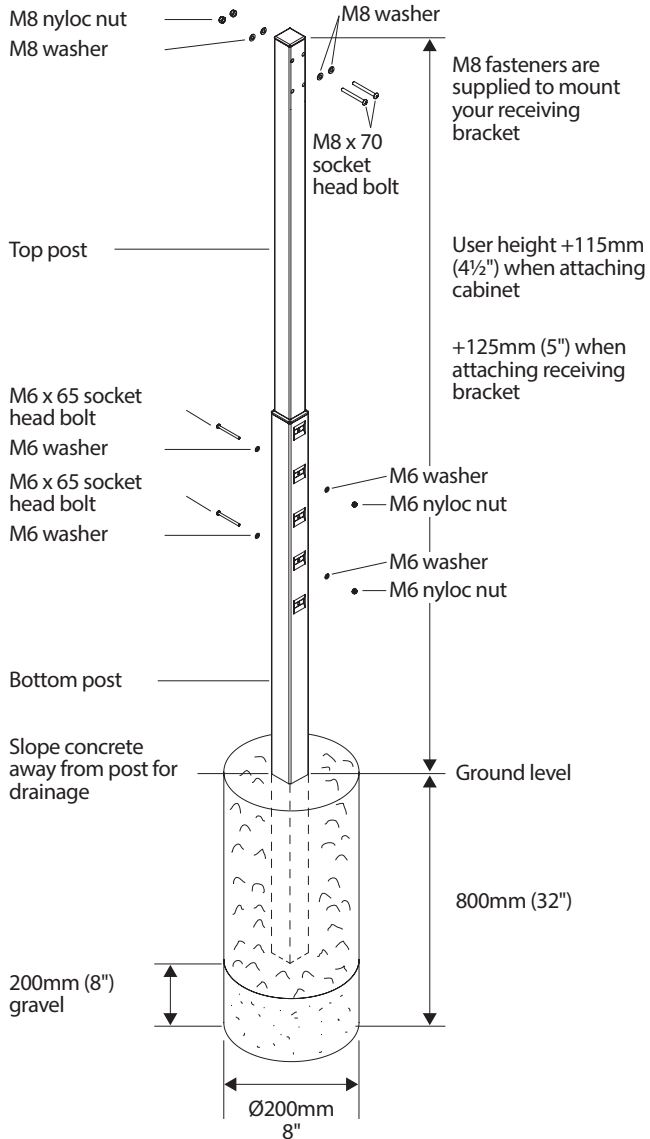

Note: Optional ground socket accessory available if post removal required.

In addition to all rights and remedies to which you may be entitled under the New Zealand Consumer Guarantees Act (1993) and any other relevant legislation, Holdfast NZ Limited warrants the product to be free from defects in materials or workmanship for 10 years from the date of purchase.

In the event of a claim, you must take the product with proof of purchase and an explanation of the fault to the place of purchase or contact Holdfast NZ Limited and provide your proof of purchase. All costs associated with the return of the good (and other expenses incurred in claiming under this warranty) are your responsibility. We will, at our option, either repair or replace the product if it has a defect in its materials or workmanship.

Holdfast NZ Limited liability under this warranty is subject to Holdfast NZ Limited being satisfied that a defect was caused by defective workmanship or materials and was not caused by or substantially contributed to by other factors including (but not limited to) maintenance or repair, adjustments or modifications of the product in a manner not recommended by the manufacturers or any neglect, misuse or excessive use. For the avoidance of doubt, this warranty does not cover acts of God, earthquake, cyclone, fire, explosion, flood, landslide, lightning, storm, tempest, drought or meteor, war, terrorism, restraint or damage to property by or under the order of any government authority or industrial action.

You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For goods purchased within New Zealand, this warranty is provided by Holdfast NZ Limited, 14 Avalon Drive, Nawton, Hamilton. Phone 0800 70 10 80.

Holdfast Contacts

HOLDFAST NZ LTD

14 Avalon Drive, SH 1, Nawton 3200

PO Box 4206, Hamilton East 3247

Hamilton, New Zealand

Ph: (07) 847 5540, Fax (07) 847 0324

Free Phone: 0800 70 10 80

Email: sales@holdfast.co.nz

www.holdfast.co.nz

